




蘇鐵機械

蘇錦工業有限公司

Su Zin Industry Co., Ltd.

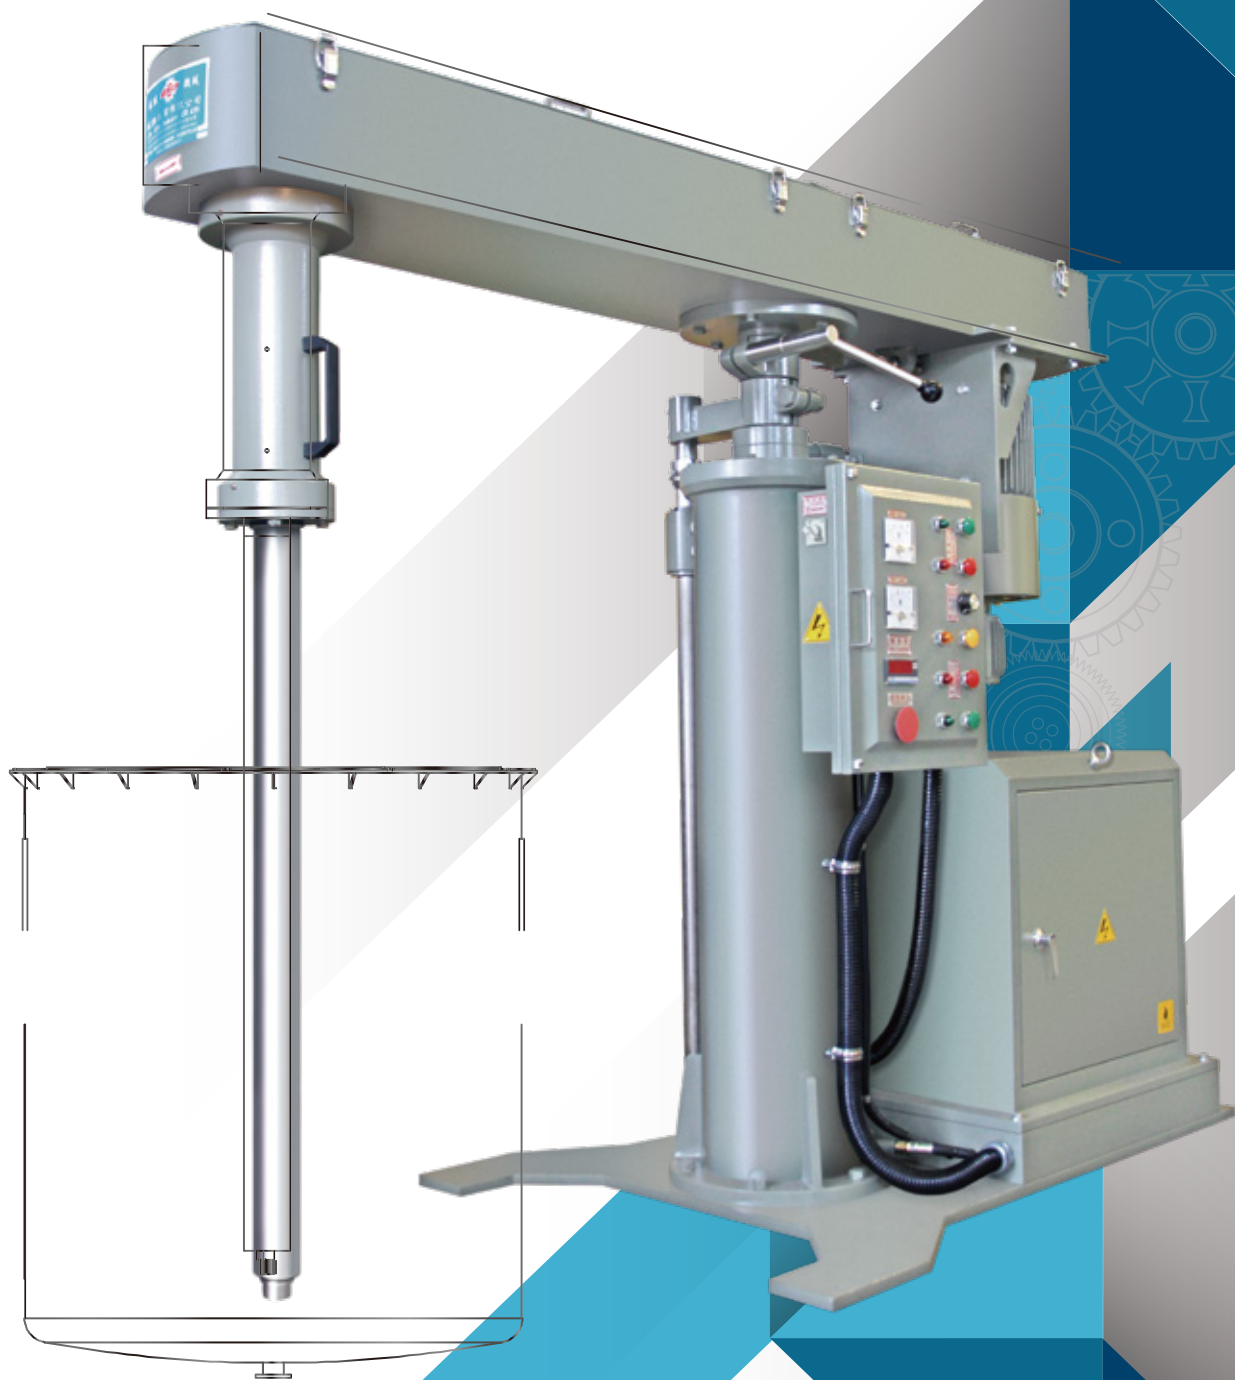

客製化
Customization



建築塗料
Architectural
Coatings



化妝品
Cosmetic



金屬烤漆
Baking Paint



油墨
Printing Ink

研磨介質 Grinding Medium



A級瑪瑙	
粒徑	8mm~10mm
莫氏硬度	≥7
密度	2.60-2.70 g/cm3
說明	天然寶石耐磨堅韌適合球磨機使用，真圓度B級瑪瑙較高，不易受推擠破裂

A-Grade Agate	
Size	8mm~10mm
Hardness according to Mohs	≥7
Density	2.60-2.70 g/cm3
Description	Nature stone with wear-resistance. B-grade Agate with better circularity. The circularity of B grade is better and it is not easy to crash during the operation



B級瑪瑙	
粒徑	8mm~10mm
莫氏硬度	≥7
密度	2.60-2.70 g/cm3
說明	天然寶石耐磨堅韌適合與A級瑪瑙混合使用

B-Grade Agate	
Size	8mm~10mm
Hardness according to Mohs	≥7
Density	2.60-2.70 g/cm3
Description	Nature stone with wear-resistance. Suitable to mix with A-grade Agate for better performance



鉻鋼珠	
粒徑	1.0mm & 2.0mm & 8.0mm
硬度	58~64 HRC
密度	7.833g/cm3
說明	硬度高，耐磨，適合乾式與濕式研磨使用

Chrome Steel Ball	
Size	8mm~10mm
Hardness	58~64 HRC
Density	7.833g/cm3
Description	High Hardness, Wear-resistance, suitable for dry, Wet mill



玻璃珠	
粒徑	2.0mm~2.5mm & 2.5mm-3.0mm & 11mm
莫氏硬度	≥6
密度	2.59g/cm3
堆積密度	1.59g/cm3
說明	經濟便宜，適合濕式研磨以及過濾使用

Glass Beads	
Size	2.0mm~2.5mm & 2.5mm-3.0mm & 11mm
Hardness according to Mohs	≥6
Density	2.59g/cm3
Bulk Density	1.59g/cm3
Description	Suitable for wet grinding and filtration



ZS矽酸鋯珠	
粒徑	0.6mm & 0.8mm & 1.0mm & 1.2mm & 1.4mm & 1.8mm & 2.0mm & 2.2mm & 6mm
維氏硬度	≥800
密度	>4.0g/cm3
堆積密度	≥2.5g/cm3
說明	經濟便宜，適合濕式研磨

ZS Zirconium Silicate Beads	
Size	0.6mm & 0.8mm & 1.0mm & 1.2mm & 1.4mm & 1.8mm & 2.0mm & 2.2mm & 6mm
Vickers hardness test	≥800
Density	>4.0g/cm3
Bulk Density	≥2.5g/cm3
Description	Suitable for wet grinding



ZA 氧化鋯珠	
粒徑	0.6mm & 0.8mm & 1.0mm & 1.2mm & 1.4mm & 1.8mm & 2.0mm & 2.2mm & 6mm
維氏硬度	≥ 1050
密度	> 5.4g/cm3
堆積密度	≥2.5g/cm3
說明	單價適中，耐用

ZA Zirconium Aluminium Beads	
Size	0.6mm & 0.8mm & 1.0mm & 1.2mm & 1.4mm & 1.8mm & 2.0mm & 2.2mm & 6mm
Vickers hardness test	≥ 1050
Density	> 5.4g/cm3
Bulk Density	≥2.5g/cm3
Description	Reasonable price , Highly durable



ZC 鈮鋯珠	
粒徑	0.3mm~1.0mm & 1.2mm & 1.4mm & 1.6mm & 1.8mm & 2.0mm & 2.2mm & 2.5mm & 2.8mm & 3.2mm & 4.0mm & 5.0mm & 6.0mm
維氏硬度	> 1150
密度	> 6.1g/cm3
堆積密度	≥3.75g/cm3
說明	奈米適用

ZC Zirconium Cerium Beads	
Size	0.3mm~1.0mm & 1.2mm & 1.4mm & 1.6mm & 1.8mm & 2.0mm & 2.2mm & 2.5mm & 2.8mm & 3.2mm & 4.0mm & 5.0mm & 6.0mm
Vickers hardness test	> 1150
Density	> 6.1g/cm3
Bulk Density	≥3.75g/cm3
Description	Suitable for Nano grinding



ZY 鈮鋯珠	
粒徑	0.05mm & 0.1mm~1.0mm & 1.2mm & 1.4mm & 1.6mm & 1.8mm & 2.0mm & 2.2mm & 2.5mm & 2.8mm & 3.2mm & 4.0mm & 5.0mm & 6.0mm
維氏硬度	> 1200
密度	> 6.05g/cm3
堆積密度	≥3.7g/cm3
說明	最高品質研磨介質

ZY Zirconium Yttrium Beads	
Size	0.3mm~1.0mm & 1.2mm & 1.4mm & 1.6mm & 1.8mm & 2.0mm & 2.2mm & 2.5mm & 2.8mm & 3.2mm & 4.0mm & 5.0mm & 6.0mm
Vickers hardness test	> 1200
Density	> 6.05g/cm3
Bulk Density	≥3.7g/cm3
Description	Suitable for Nano grinding , Ultra quality

ARO® 氣動雙隔膜PUMP

ARO® Air Operated Diaphragm Pumps





蘇錦工業有限公司 Su Zin Industry Co., Ltd.



ADD | 429台中市神岡區大富路61巷96號

No.96, Ln. 61, Dafu Rd., Shengang Dist., Taichung City 429, Taiwan

TEL | +886 4-2522-6049 / +886 4-2526-7219

FAX | +886 4-2523-1065

E-MAIL | service@sute.com.tw

www.sute.com.tw



食品
Food



家具塗料
Furniture Coating



金屬漿料
Meal Paste



接著劑
Sealing

SU TE